

REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.06.10	DENG	JIN

- Material
 - ①Pin header: Copper alloy, Tin plated
 - ②Housing: PA66, UL94V-0

- Electrical

UL	IEC
Rated Voltage: 300V	630V
Rated Current: 15A	16A
Contact Resistance: 20mΩ	




- Insulation Resistance: 500MΩ/DC500V
- Withstanding Voltage: AC1500V/1Min

- Mechanical
 - Temperature Range: -30°C ~ +105°C
 - MAX Soldering: +250°C.(5 Seconds)

- RoHS compliance

HOW TO ORDER

KF475-R-7.5-XXP-1 X-XXXXX

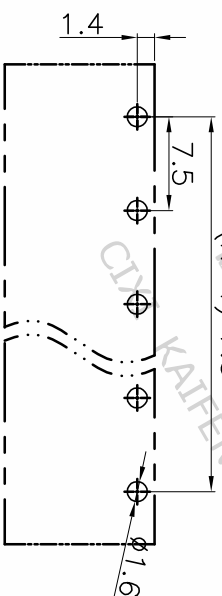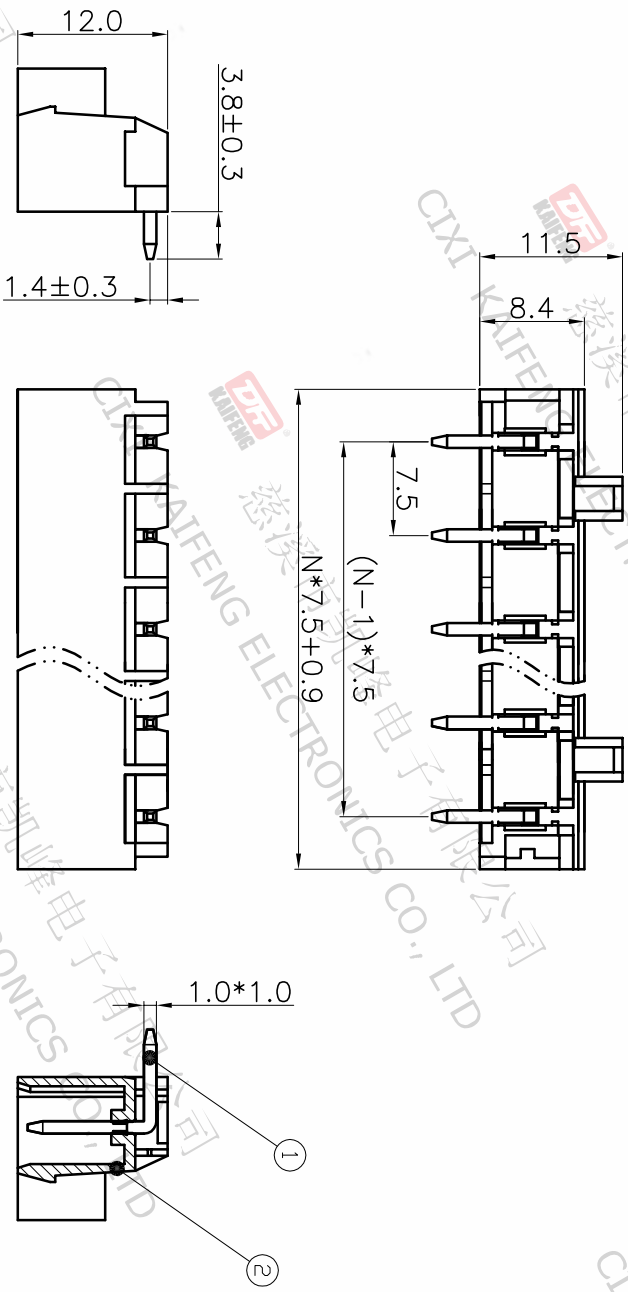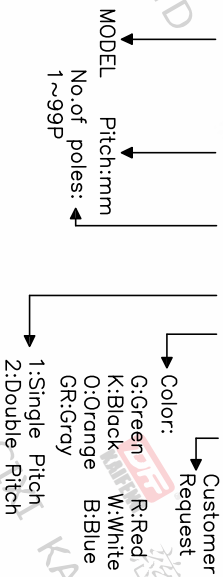

Pitch range	Nominal dimension range	PROJECTION	UNIT
>0	>0	0.1/10	mm
~6	~30		
~10	~60		
~24	~100		
~30	~150		
±0.15	±0.30	±2°	
±0.20	±0.30		
±0.30	±0.50		
±0.70	±1.00		
±1.30	±1.30		

DF 慈溪市凯峰电子有限公司
CIXI KAIFENG ELECTRONICS CO.,LTD

DRAWING TYPE: CUSTOMER DRAWING
SCALE: 1:1 SHEET: 1 OF 1
DRAWING NO.: W16000132

TITLE: KF475-R-7.5-XXP-1X
SHEET SIZE: A4
SERIES: KF475